


AKUSTIK + **sylomer**[®] by getzner




AMC
MECANOCAUCH



FZ + Sylomer®



TSR + Sylomer®



Noise isolation ceiling



SRB & SRS + Sylomer®

Grado Akustik

Springtec & Springtec Super

Akustik + Sylomer®




SCB



Vibrabsorber + Sylomer®




Transformers



Noise isolation wall




EP+Sylomer®




4 AMC Seismic + Sylomer®



BRB



FZH + Sylomer®



Noise isolation floor





Factory 1 of AMC-MECANOCAUCHO



Factory 2 of AMC-MECANOCAUCHO



Factory of sylomer in Austria.



Akustik+Sylomer® is the trademark of a new solution for the anti-vibration mountings of false ceilings or vibrating elements that have to be suspended. They are used for the attenuation of vibrations, reducing structure-borne noise.

AMC-MECANOCAUCHO® has been manufacturing anti-vibration suspensions since 1969, and since then it has been manufacturing suspensions for this same purpose, using rubber, spring or a combination of both, called **Akustik**.


GETZNER Werkstoffe GmbH manufactures a prestigious anti-vibration material called **Sylomer®** whose main application has been the isolation of vibrations produced by railways. Operating from Austria since 1969, it is now the leader in its sector, and boasts totally cutting edge technological facilities and media for vibration isolation.

The **Akustik+Sylomer®** ceiling mounts are made of Sylomer®, a microcelular polyurethane material specially conceived for vibration isolation. This material produces a higher degree of damping than the elastomers traditionally used for this purpose.

ENGINEERING



LOGISTICS

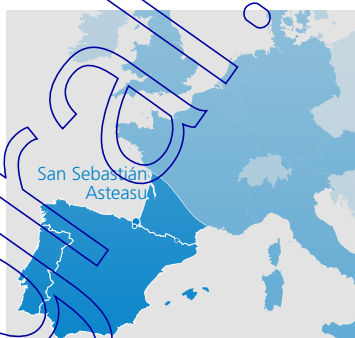

24 h.





48 h.



72 h.

ANTIVIBRATION CALCULATIONS

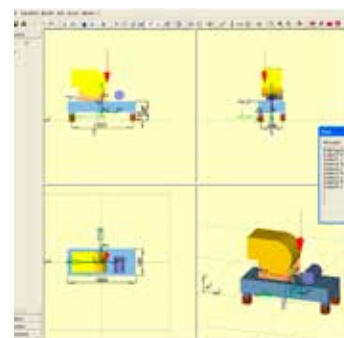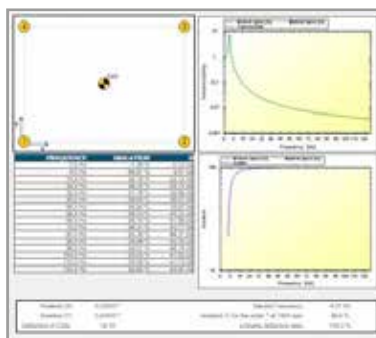


EXPOSITION TOOLS FOR DISTRIBUTORS



< The cooperation of two great companies

QUALITY

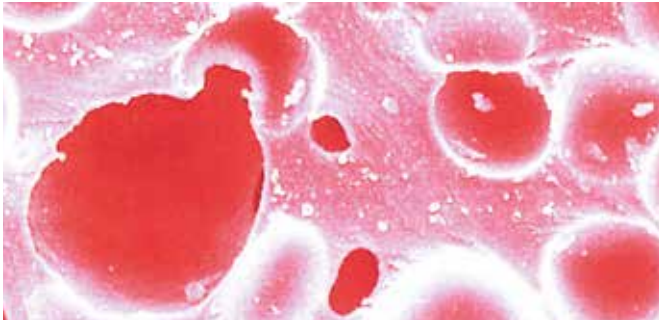

We have more than 45 years of experience providing quality products, capable of overcoming the most demanding tests. For this purpose it is vital our knowledge on the correct manufacturing processes and the use first grade components.

SERVICE



We keep in stock more than 3 Million euros of finished products. This fact is key to respond quick to urgent enquiries.

ENGINEERING SERVICES



Calculations • Development • Tests • Measurements

Our technical department makes calculations, develops new products, analyzes their elastical properties and make on site measurements in order to find the correct technical solution to solve each vibration problem.

DISTRIBUTOR SUPPORT




AMC-MECANOCAUCHO offers a wide range of exposition displays on store. Should you require one, do not hesitate to contact our sales dpt, so they can offer you the one that adapts better to your needs.

"The SUPER security in your installation"


Akustik Super

The "SUPER" security feature is adaptable to the different profiles existing on the market. The external dimension of the profiles that exist on the market may vary, our "SUPER" security system with lip form adapts to the different lengths of the profile having a tight fit.


1- The security system is adaptable to different widths of profiles.

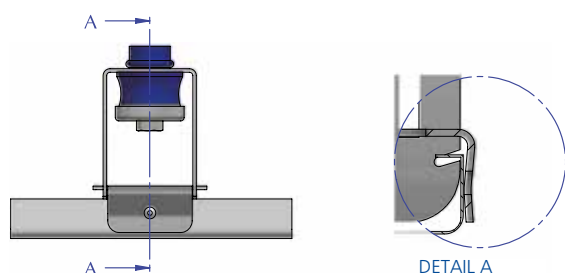


2- The "SUPER" security system admits the possibility of inserting a blocking screw.

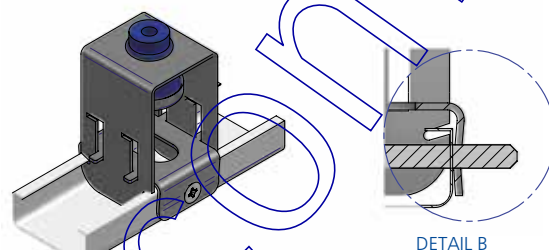

Installation Steps

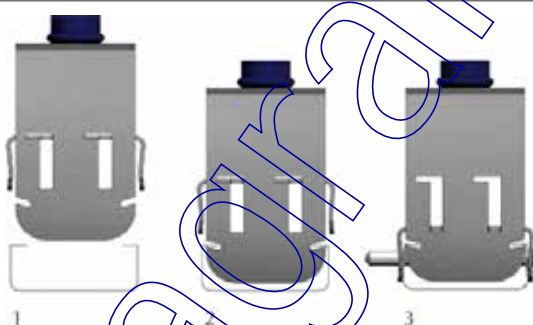

Installation of Akustik Super rubber

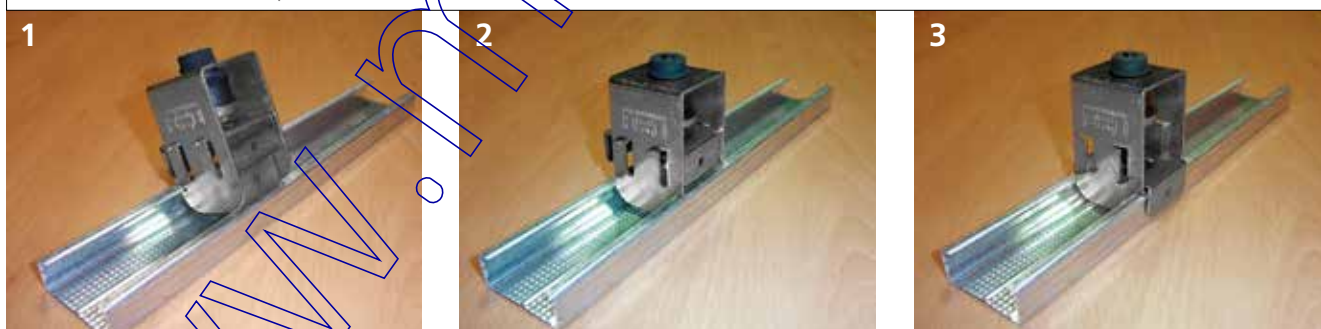


Installation of Akustik Super + **sylomer**[®]



Akustik+ **sylomer**[®] by getzner

When 2 dB at low frequencies
make the difference

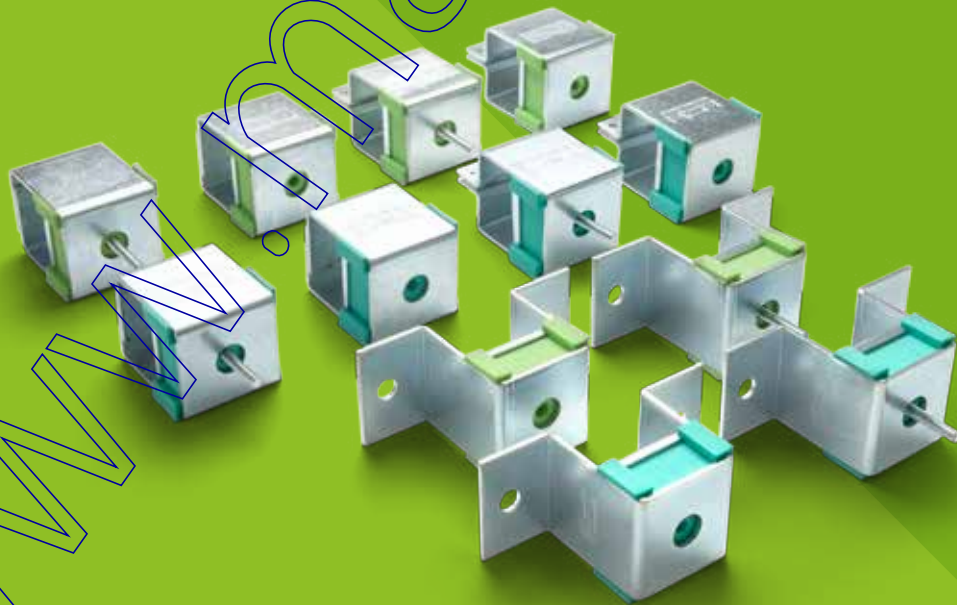

COMPARATIVE TESTS AT THE LABEIN TECHNOLOGY CENTRE

Akustik+Sylomer® is the trademark of a new solution for the anti-vibration mountings of false ceilings or vibrating elements that have to be suspended. They are used for the attenuation of vibrations, reducing structure-borne noise.

The **Akustik+Sylomer®** ceiling mounts are made of Sylomer®, a microcellular polyurethane material specially conceived for vibration isolation. This material produces a higher degree of damping than the elastomers traditionally used for this purpose.

The **Labein** technology centre performed a series of comparative tests to confirm the good acoustic results of Akustik+Sylomer®. This centre is officially ENAC-certified and complies with the requirements of the ISO 140-1:1997 standard.

PURPOSE OF THE TEST

The purpose of the test is to compare, in equal conditions, the acoustic isolation to air-borne noise of a false ceiling without anti-vibration suspensions (direct transmission) to a false ceiling with the new Akustik+Sylomer® suspensions.


The secondary endpoint is to compare the Akustik+Sylomer® to another suspension with the same size-specific characteristics using high-resilience natural rubber from our Akustik 4 45 shore A standard series.

TEST METHODOLOGY

The reports contain the results of the noise isolation test to airborne noise conducted according to the UNE-EN ISO 140-3 standard for a false ceiling with the following ceiling mounts:

- Direct transmission (without antivibration suspensions).
- Akustik 4 45 shore A.
- Akustik 3 + Sylomer®30 Type B.

Besides the isolation curves, two RW and RA indexes have been calculated and used to compare the performance of the different suspensions. The RW noise reduction index of the sample tested and the terms of adaptation of the C and Ctr spectrum were obtained according to the ISO 717-1 standard, based on the isolation curve. The pink noise isolation index RA between 100Hz and 5 KHz is that which is specified by the Basic Spanish Building Standard: NBE-CA 88 "Acoustic Conditions".

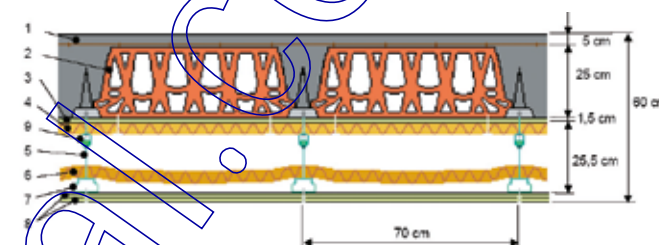

Specimen used for the test

IMPORTANT NOTE: The composition of the false ceiling is not meant to be used for teaching purposes in acoustics. It is a standard implementation whose objective is to compare the anti-vibration elements. The specimen used in the tests is a standard ceramic hollow block with an approximate isolation of 54 dB.



The results and the descriptive reports can be downloaded free of charge from www.akustik.com

COMPARATIVE TESTS AT THE
LAEIN TECHNOLOGY CENTRECOMPARATIVE RESULTS OF THE TEST BETWEEN
A SUSPENDED CEILING WITH AND WITHOUT
AKUSTIK+SYLOMER[®].

Graphic 1 shows the isolation provided by a single plasterboard suspended with Akustik + Sylomer[®] suspensions and the same ceiling fitted with M6 rod. The blue line represents the isolation achieved with Akustik + Sylomer[®] mounts.

As can be seen, there are major differences at low and high frequencies, offering a difference of:

- 3 dB at 125 Hz
- 6 dB at 250 Hz
- 5 dB at 500 Hz
- 5 dB at 1000Hz

At the same time, comparative tests were conducted with ceilings with a greater number of plasterboards. Table 1 shows the results of the RW reduction index:

It is clear that the use of Akustik+Sylomer[®] suspensions provides far greater airborne isolations, which in some cases are equivalent to or greater than the use of 2 or 3 plasterboards with anti-vibration ceiling mounts.

The results and descriptive reports can be downloaded free from www.akustik.com

Akustik isolation curves

Graphic 1


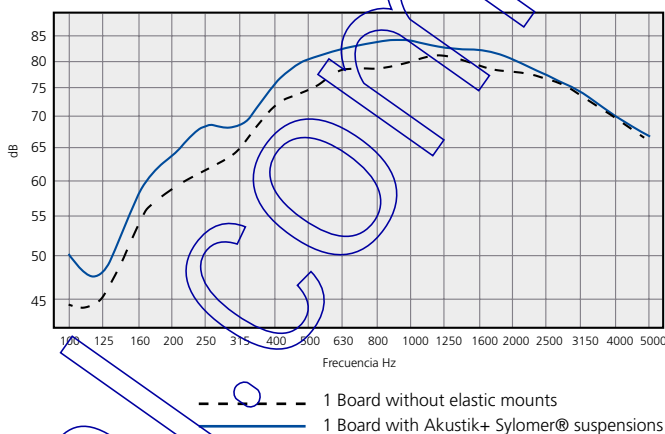


Table 1

| RW sound isolation index | Without suspensions(M6 rod) | With suspensions Akustik + sylomer [®] |
|--------------------------|-----------------------------|---|
| 1 plasterboard | 71 dB | 75 dB |
| 2 plasterboard | 73 dB | 75 dB |
| 3 plasterboard | 74 dB | 77 dB |

Gain in dB thanks to the use of the Akustik+Sylomer[®] suspensions as opposed to a ceiling without elastic suspensions.

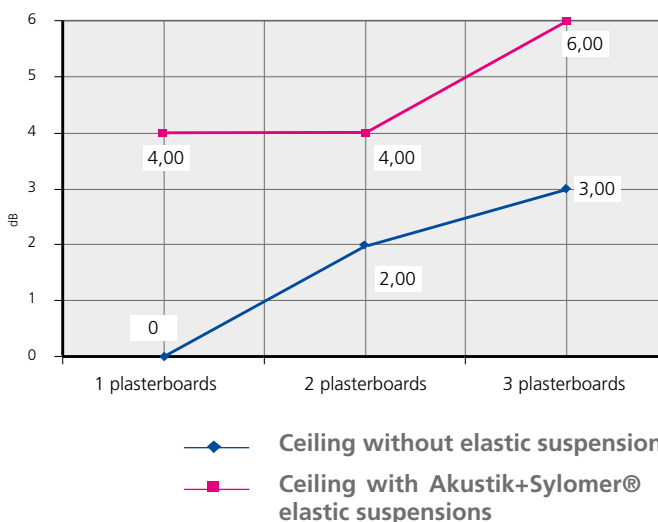

COMPARATIVE TESTS AT THE LABEIN TECHNOLOGY CENTRE

COMPARATIVE RESULTS OF THE TEST BETWEEN A SUSPENDED CEILING WITH AKUSTIK+SYLOMER VS RUBBER SUSPENSIONS.

Table 2 compares the RA sound isolation index according to the number of plasterboards.

The improvement is self-evident, the akustik+sylomer® mounts offer a superior isolation to the rubber mounts. This difference is so great that it may be said that a ceiling with a plasterboard with akustik+sylomer® offers the same isolation as a ceiling with two plasterboard rubber suspensions. This therefore means savings in time and material.

The savings in plasterboard and labour costs make these mounts particularly interesting, both technically and economically.

In order to provide a better analysis of the differences between the rubber mounts and the akustik+sylomer® mounts, table 3 shows the isolation data at different frequencies.

The results of these tables show that the isolation differences are in the low frequency range, which is particularly interesting for the isolation of premises without soundproofing, since they are particularly difficult to isolate.

Table 2

| RW sound isolation index | Akustik + sylomer® | RUBBER |
|--------------------------|--------------------|--------|
| 1 plasterboard | 75 dB | 74 dB |
| 2 plasterboard | 75 dB | 75 dB |
| 3 plasterboard | 77 dB | 76 dB |

Table 3

| Suspended ceiling with 1 plasterboard | | |
|---------------------------------------|--------------------|---------|
| FREQUENCY | Akustik + sylomer® | RUBBER |
| 160 Hz. | 58,3 dB | 57,5 dB |
| 250 Hz. | 68,4 dB | 66 dB |
| 500 Hz. | 80,3 dB | 79,1 dB |

| False ceiling with 2 plasterboards | | |
|------------------------------------|--------------------|---------|
| FREQUENCY | Akustik + sylomer® | RUBBER |
| 160 Hz. | 57 dB | 56,9 dB |
| 250 Hz. | 70 dB | 68 dB |
| 500 Hz. | 81,5 dB | 81,1 dB |

| False ceiling with 3 plasterboards | | |
|------------------------------------|--------------------|---------|
| FREQUENCY | Akustik + sylomer® | RUBBER |
| 160 Hz. | 60,4 dB | 58,5 dB |
| 250 Hz. | 69,4 dB | 67 dB |
| 500 Hz. | 82,4 dB | 81,1 dB |

AKUSTIK + sylomer[®]

BEHAVIOUR AT HIGH AND LOW FREQUENCIES

Structure-borne noise is that which is transmitted through the structures of a building, machine, installation... This radiation noise becomes airborne noise.

Low noise frequencies are those that are usually less damped in the air and are therefore better transmitted through structures. The range of low frequencies is between 20 and 500 Hz.

NATURAL FREQUENCY OF THE AKUSTIK+ SYLOMER[®] MOUNTS

The akustik+sylomer[®] ceiling mounts can obtain very low natural frequencies of up to 7 Hz at the optimal loading point. At this loading point the decoupling frequency of the akustik+sylomer[®] mounts is 9,9Hz.

Such a low natural frequency is optimal for the false ceilings of soundproofed premises. This type of suspensions are also particularly interesting for the isolation of machines or vibrating elements that work at

more than 600 rpm. Examples are:

- Ducts / pipelines:
 - Of cooling liquids from refrigerating compressors, and are ideal for use in supermarkets, the frozen food section.
 - Air conditioning.
 - Pumping of water
 - From fume exhausts.
- Suspension of air conditioning machinery.
- Suspension of vibrating elements in general.

BEHAVIOUR OF THE AKUSTIK+SYLOMER[®] MOUNTS AT LOW FREQUENCIES IN SOUNDPROOFED PREMISES.

The range of audible frequencies in the human being may vary according to age and to other factors although in general it is between 20 Hz and 20.000Hz. By way of example the notes produced by a guitar have a frequency range from 82 to 698 Hz.

Considering that the most unfavourable excitation frequency, i.e. 20 Hz, the isolation degree of structure-borne noise produced by an akustik+sylomer[®] suspension would be close to 90%. (*)

(*) Installation of the optimal loading point of the akustik + sylomer for a theoretical single mass spring system

BEHAVIOUR OF THE AKUSTIK+SYLOMER[®] MOUNTS AT MEDIUM AND HIGH FREQUENCIES.

Sound waves are not comprised of just one frequency, but rather of a set of frequencies superimposed without any order, which is the main reason why noise is unpleasant. Thus, the ideal suspender must be able to isolate the broadest possible range of frequencies.

Behaviour of a metal spring

These suspenders are often recommended for the elastic suspension of false ceilings. It is important to know that this

type of mount is suitable for the damping of low frequencies, whereas the high frequencies are propagated through the coils of the spring. To filter this type of frequencies the springs must be combined with a stage of viscoelastic material under the spring to stop the propagation of this type of vibration.

Behaviour of the akustik+ Sylomer

Thanks to the viscoelastic properties of the Sylomer, the akustik+Sylomer has a behaviour similar to the spring at low frequencies and at the same time not only prevents the high frequencies as occurs in the spring via its coils, but also considerably improves the behaviour of the rubber at high frequencies. These results are shown in the comparative section of Akustik + Sylomer with regard to rubber suspenders.

CREEPING AND LONG-TERM BEHAVIOUR

Static loads produce a certain degree of creeping. This phenomenon can be observed in all elastomers. Creeping is the increase in deformation under consistent loading Figs. 1 and 3 show the creeping for the two types of Sylomer[®] used for our ceiling mounts.

Within the field recommended for the application of continuous loads, the additional deflection remains under 50% of the initial deflection even after an extended period of 10 years.

The dynamic stiffness of the ceiling mounts must increase as little as possible over time. Figs. 2 and 4 show the variation of the dynamic module over time of the two types of Sylomer used in our ceiling mounts.

Sylomer[®] Low Loads

Fig. 1 "Creeping" Behaviour





Fig. 2 Dynamic modulus of elasticity at long term loading



Sylomer[®] High Loads

Fig. 3 "Creeping" Behaviour





Fig. 4 Dynamic modulus of elasticity at long term loading



CEILING MOUNTS

Akustik + Sylomer®: Models and dimensions

PRODUCT DESCRIPTION



These antivibration mounts have been conceived for suspension from false ceilings, vibrating pipelines and machinery that has to be suspended.

The excellent properties of the Sylomer® microcelular polyurethane achieve eleva-

ted isolation values as opposed to other mounts using rubber or cork, or a combination of both. These antivibration mounts are manufactured in two special mixes of Sylomer® to adapt better to the load of each application.




A great variety of fixing metal

armors and elements facilitate installation and adapt better to each type of job. Their rugged metal parts withstand can tensile stresses from 650 kg to 1000 kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.






Akustik 1

It is secured directly to the ceiling by means of two holes.






Akustik 3

It is secured directly to the ceiling with a screw and locking nut.






Akustik 4

It is secured with a screw via a nut welded to the metal armor.






Akustik Rapid

Designed to be secured to most profiles on the market. Its design makes for easy and safe installations.



Akustik Safety

Its gravitational system guarantees correct installation and offers greater safety, preventing elements from becoming detached. Thanks to its design, the mount will not attach to the profile if it is not installed properly. It prevents possible slip-ups. Its 45° forked design makes installation and removal easy and safe.



AKUSTIK + sylomer[®]


CEILING MOUNTS

Akustik + Sylomer[®]: Models and dimensions

TYPE OF FIXING



TYPE A

For installations where M6 male fixing is required, the recommended fixing is **Type A**.

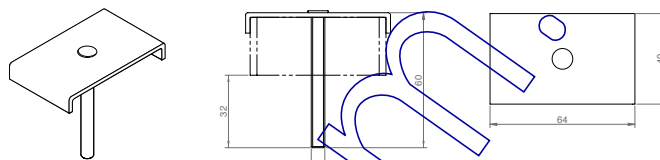



TYPE B

For installations where M6 female fixing is required, the recommended fixing is **Type B**.




Akustik
Super T47

The "SUPER" security feature is adaptable to the different profiles existing on the market.

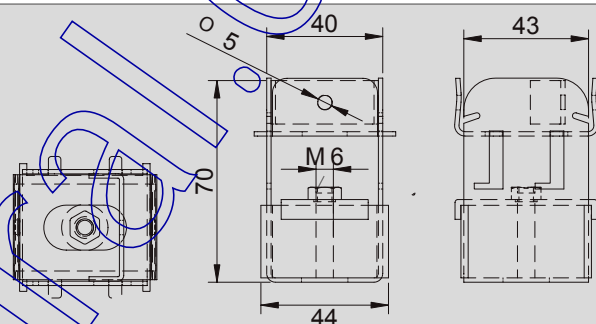


Akustik
Super T60

The external dimension of the profiles that exist on the market may vary, our "SUPER" security system with lip form adapts to the different lengths of the profile having a tight fit.

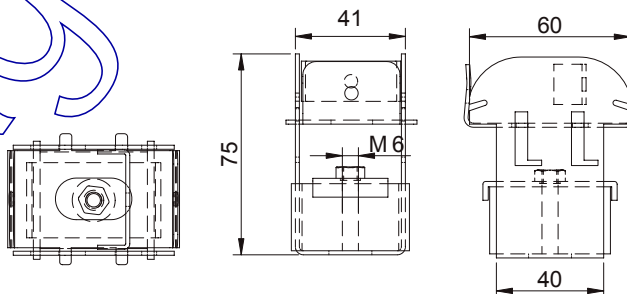


INSTALLATION STEPS OF AKUSTIK SUPER

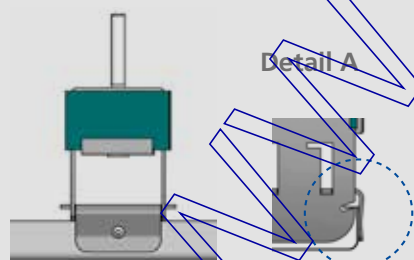


Detail A

1• The security system is adaptable to different widths of profiles.

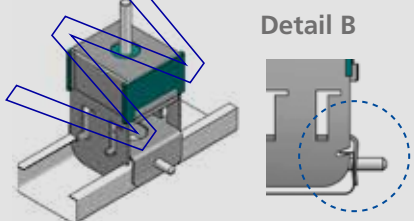

Detail B

2• The "SUPER" security system admits the possibility of inserting a blocking screw.

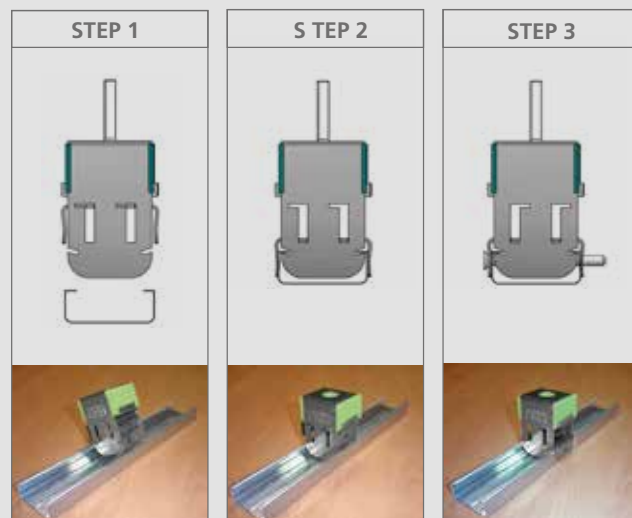


CEILING MOUNTS


Akustik + Sylomer®: Models and dimensions

TYPES OF SYLOMER


LOAD DEFLECTION GRAPH
Akustik + Sylomer **30**

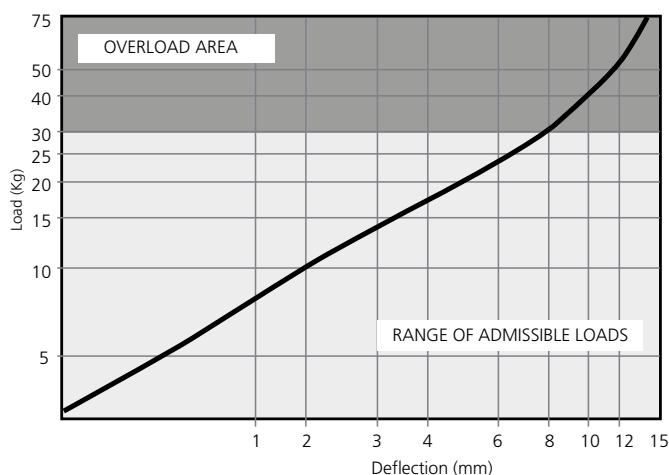


NATURAL FREQUENCY
Akustik + Sylomer **30**

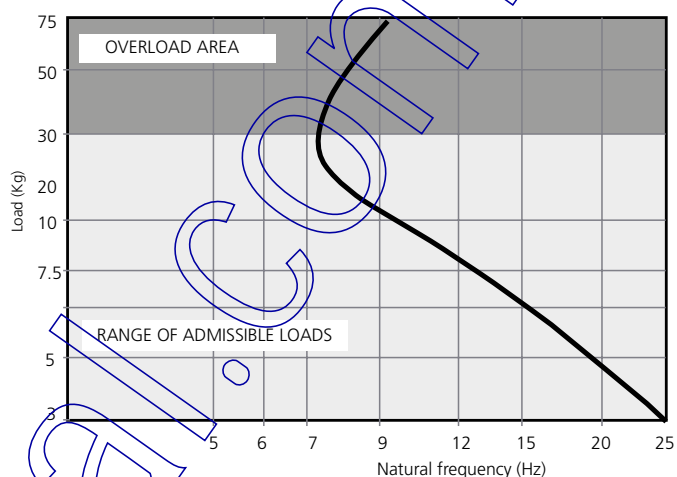

LOAD DEFLECTION GRAPH
Akustik + Sylomer **75**

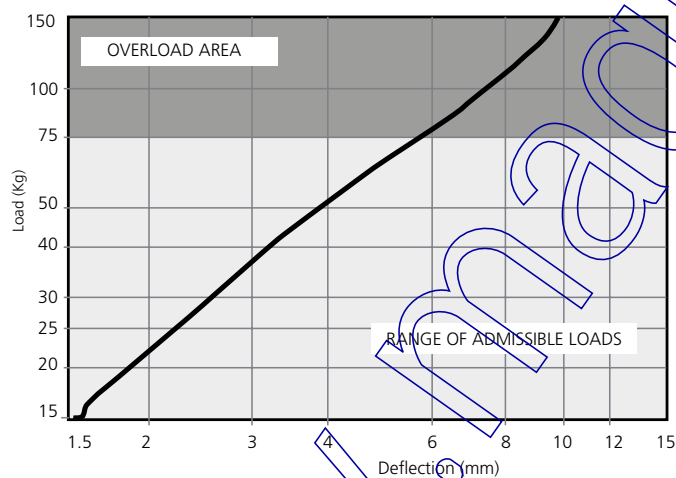

NATURAL FREQUENCY
Akustik + Sylomer **75**

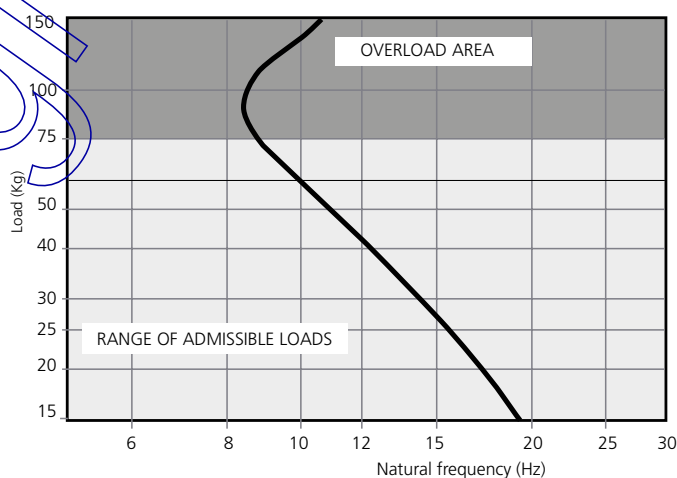











Application of an Akustik 4+Sylomer 30 type A.



Application of an Akustik Super T60 +Sylomer 30 type B.











CEILING MOUNTS

Akustik + Sylomer[®]: Range

| REF AMC | SUMMARY | (Kg) MAX. LOAD | CODE |
|--|--|-------------------|-------|
|  Akustik 1 + Sylomer@30 Type A | Ventana del Akustik 1 fijada al techo con dos agujeros y un Type de FIXING macho M- 6. | 30 | 23501 |
|  Akustik 3 + Sylomer@30 Type A | Metal armor of the akustik 3 secured to the ceiling by an M6 screw and with a nut. | 30 | 23503 |
|  Akustik4 + Sylomer@30 Type A | Metal armor of the Akustik 4 secured to the ceiling by an M6 screw. | 30 | 23505 |
|  Akustik Rapid + Sylomer@30 Type A | Metal armor of the Akustik rapid secured to the ceiling by an M6 screw. | 30 | 23507 |
|  Akustik Safety + Sylomer@30 Type A | Metal armor of the Akustik Safety secured to the ceiling by an M6 screw. | 30 | 23508 |
|  Akustik 1 + Sylomer@30 Type B | Metal armor of the Akustik 3 secured to the ceiling by a welded M6 nut. | 30 | 23509 |
|  Akustik 3 + Sylomer@30 Type B | Metal armor of the Akustik 4 secured to the ceiling by a welded M6 nut. | 30 | 23511 |
|  Akustik4 + Sylomer@30 Type B | Metal armor of the Akustik Rapid secured to the ceiling by a welded M6 nut. | 30 | 23513 |
|  Akustik Rapid + Sylomer@30 Type B | Metal armor of the Akustik Safety secured to the ceiling by an M6 screw. | 30 | 23515 |
|  Akustik STeguridad + Sylomer@30 TypeB | Metal armor of the Akustik Safety secured to the ceiling by a welded M6 nut. | 30 | 23516 |













CEILING MOUNTS





Akustik + Sylomer®: Range

| REF. AMC | SUMMARY | (Kg) MAX. LOAD | CODE |
|---|---|-------------------|-------|
|  Akustik 1 + Sylomer®75 Type A | Metal armor of the Akustik 1 secured to the ceiling with two holes and an M6 male fixing type (Type A). | 75 | 23517 |
|  Akustik 3 + Sylomer®75 Type A | Metal armor of the akustik 3 secured to the ceiling by an M6 screw and with a nut. | 75 | 23519 |
|  Akustik4 + Sylomer®75 Type A | Metal armor of the Akustik 4 secured to the ceiling by an M6 screw. | 75 | 23521 |
|  Akustik Rapid + Sylomer®75 Type A | Metal armor of the Akustik rapid secured to the ceiling by an M6 screw. | 75 | 23523 |
|  Akustik Safety + Sylomer®75 Type A | Metal armor of the Akustik 1 secured to the ceiling by a welded M6 nut. | 75 | 23524 |
|  Akustik 1 + Sylomer®75 Type B | Metal armor of the Akustik 3 secured to the ceiling by a welded M6 nut. | 75 | 23525 |
|  Akustik 3 + Sylomer®75 Type B | Metal armor of the Akustik 4 secured to the ceiling by a welded M6 nut. | 75 | 23527 |
|  Akustik4 + Sylomer®75 Type B | Metal armor of the Akustik Rapid secured to the ceiling by a welded M6 nut. | 75 | 23529 |
|  Akustik Rapid + Sylomer®75 Type B | Metal armor of the Akustik Safety secured to the ceiling by an M6 screw. | 75 | 23531 |
|  Akustik Safety + Sylomer®75 Type B | Metal armor of the Akustik Safety secured to the ceiling by a welded M6 nut. | 75 | 23533 |

CEILING MOUNTS

Akustik Super + Sylomer[®] y Akustik Sierra + Sylomer[®]: Range

| REF. AMC | SUMMARY | (KG) MAX. LOAD | CODE |
|---|---|-------------------|-------|
|  Akustik Super T60 + Sylomer®75 Type A | Metal armor of the Akustik Super secured to the ceiling by an M6 screw. | 75 | 23851 |
|  Akustik Super T60 + Sylomer®75 Type B | Metal armor of the Akustik Super secured to the ceiling by an M6 screw. | 75 | 23852 |
|  Akustik Super T47 + Sylomer®75 Type A | Metal armor of the Akustik Super secured to the ceiling by an M6 screw. | 75 | 23841 |
|  Akustik Super T47 + Sylomer®75 Type B | Metal armor of the Akustik Super secured to the ceiling by an M6 screw. | 75 | 23842 |
|  Akustik Super T60 + Sylomer®30 Type A | Metal armor of the Akustik Super secured to the ceiling by an M6 screw. | 30 | 23831 |
|  Akustik Super T60 + Sylomer®30 Type B | Metal armor of the Akustik Super secured to the ceiling by an M6 screw. | 30 | 23832 |
|  Akustik Super T47 + Sylomer®30 Type A | Metal armor of the Akustik Super secured to the ceiling by an M6 screw. | 30 | 23821 |
|  Akustik Super T47 + Sylomer®30 Type B | Metal armor of the Akustik Super secured to the ceiling by an M6 screw. | 30 | 23822 |
|  Akustik Sierra + Sylomer®75 Type A | Ventana fijada al techo mediante tornillo M6. Además, incorpora elemento de FIXING al perfil de gran sencillez. | 75 | 23865 |
|  Akustik Sierra + Sylomer®75 Type B | Ventana fijada al techo mediante tuerca soldada M6. Además, incorpora elemento de FIXING al perfil de gran sencillez. | 75 | 23866 |
|  Akustik Sierra + Sylomer®30 Type A | Ventana fijada al techo mediante tornillo M6. Además, incorpora elemento de FIXING al perfil de gran sencillez. | 30 | 23863 |
|  Akustik Sierra + Sylomer®30 Type B | Ventana fijada al techo mediante tuerca soldada M6. Además, incorpora elemento de FIXING al perfil de gran sencillez. | 30 | 23864 |

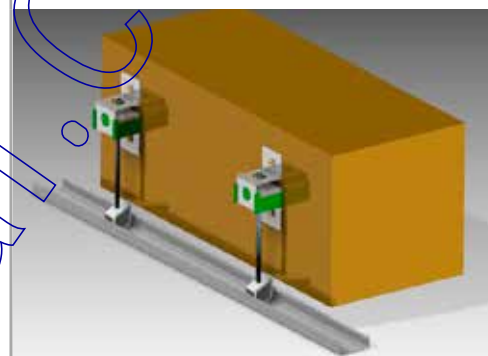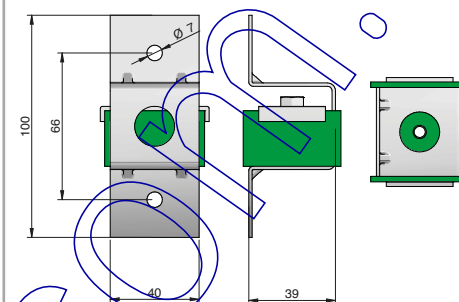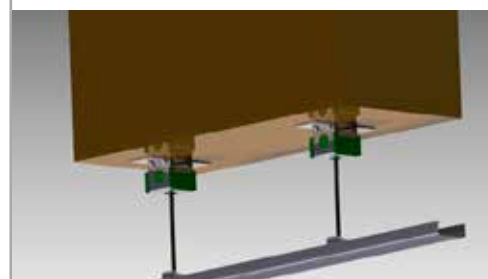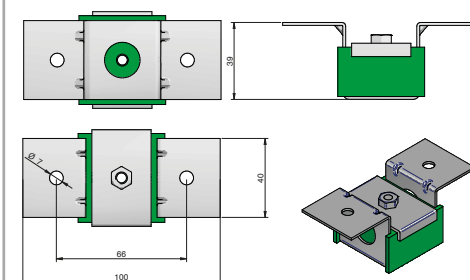Akustik 1 Lateral + Sylomer[®]Akustik 1 Lateral + Sylomer[®] (Standard position)

| REF. AMC | (Kg) max. load | CODE |
|--|-------------------|-------|
| Akustik 1 Lateral + Sylomer [®] 30 Type A | 30 | 23573 |
| Akustik 1 Lateral + Sylomer [®] 75 Type A | 75 | 23574 |
| Akustik 1 Lateral + Sylomer [®] 30 Type B | 30 | 23510 |
| Akustik 1 Lateral + Sylomer [®] 75 Type B | 75 | 23526 |

CEILING MOUNTS

Grand Akustik + Sylomer®: Models and dimensions

PRODUCT DESCRIPTION




These antivibration mounts have been conceived for suspension from false ceilings, vibrating pipelines and machinery that has to be suspended.

The excellent properties of the Sylomer® microcelular polyurethane achieve elevated isolation values as oppo-

sed to other mounts using rubber or cork, or a combination of both. These antivibration mounts are manufactured in two special mixes of Sylomer® to adapt better to the load of each application.



A great variety of fixing windows and elements facilitate installation and adapt bet-

ter to each type of job. Their rugged metal parts can withstand tensile stresses from 650 to 1000 Kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.

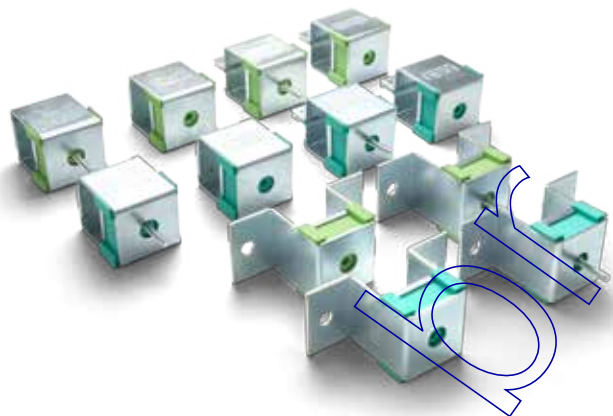



Grand
Akustik 1

It is secured to the ceiling with two holes.

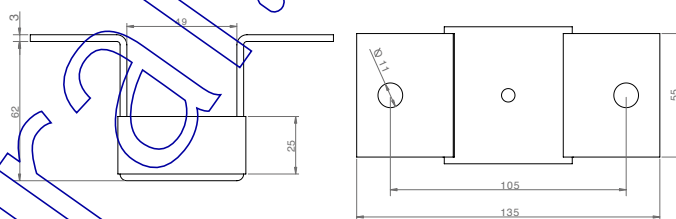


Grand
Akustik 2

It is secured directly to the ceiling by means of a screw.

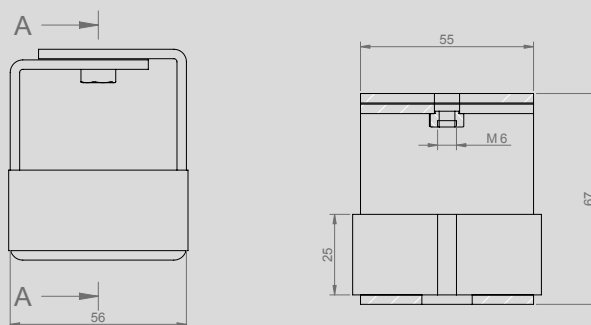

Grand
Akustik 3

It is secured directly to the ceiling by means of one screw and to the "inverted double T" type profile thanks to the design of its metal armor.

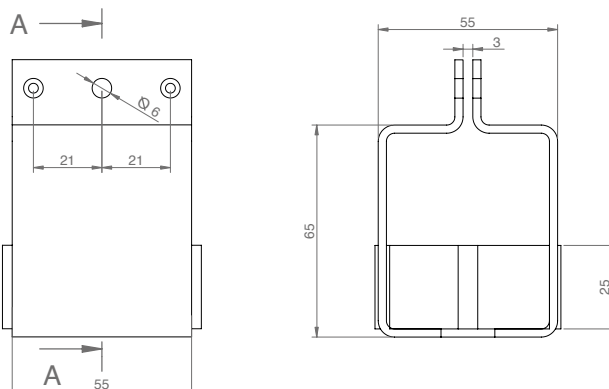


CEILING MOUNTS

Grand Akustik + Sylomer[®]: Models and dimensions

TYPE OF FIXING


Type A

For installations where M6 male fixing is required, the recommended fixing is **Type A**.

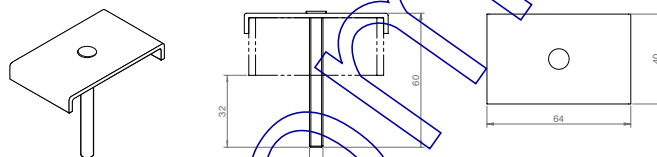


Type B

For installations where M6 female fixing is required, the recommended fixing is **Type B**.

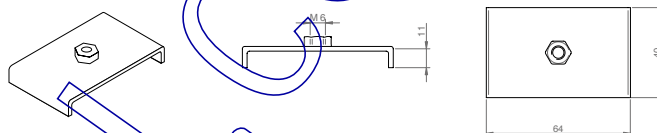


TYPES OF SYLOMER


LOAD DEFLECTION GRAPH
Grand Akustik + Sylomer 60

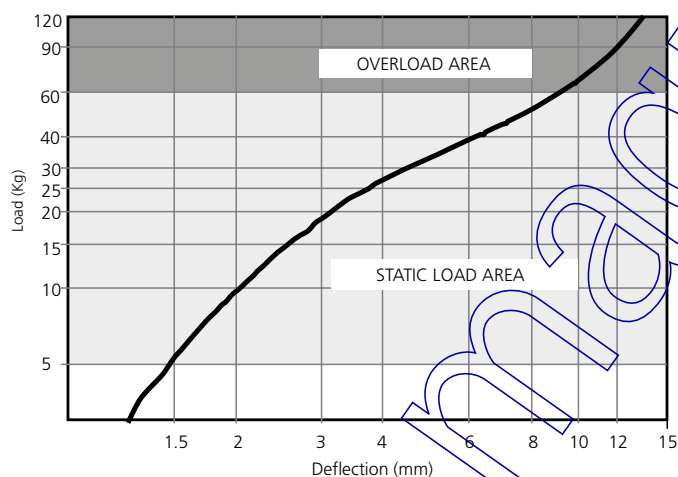


NATURAL FREQUENCY GRAPHS
Grand Akustik + Sylomer 60

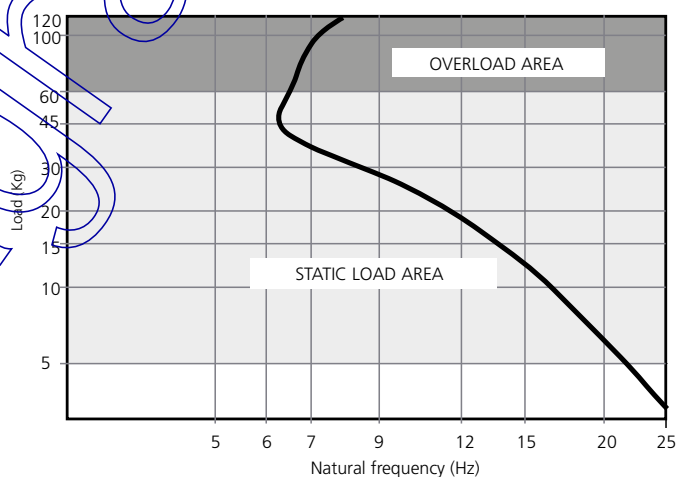

LOAD DEFLECTION GRAPH
Grand Akustik + Sylomer 150






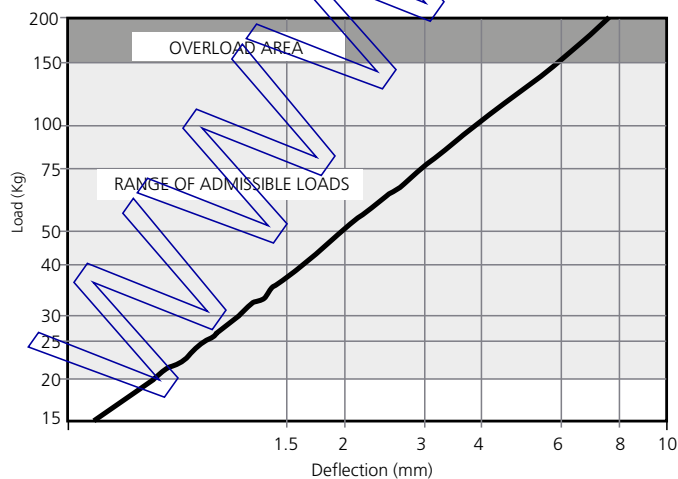


NATURAL FREQUENCY GRAPHS
Grand Akustik + Sylomer 150

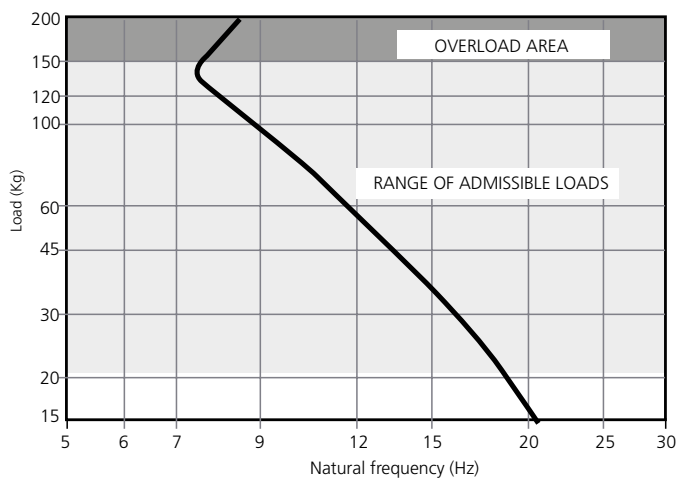







CEILING MOUNTS

Gran Akustik + Sylomer®: Range

| REF. AMC | SUMMARY | (Kg) MAX. LOAD | CODE |
|---|---|-------------------|-------|
|  <p>Gran Akustik 1 + Sylomer®60 Type A</p> | It is secured directly to the ceiling by means of two holes and to the profile by means of a "type A" screw. | 60 | 23601 |
|  <p>Gran Akustik 2 + Sylomer®60 Type A</p> | It is secured directly to the ceiling by means of one screw and to the profile by means of a "type A" screw. | 60 | 23605 |
|  <p>Gran Akustik3 + Sylomer®60 Type A</p> | It is secured directly to the ceiling by means of one screw and to the "Inverted double T" type profile thanks to the design of its metal armor. | 60 | 23607 |
|  <p>Gran Akustik 1 + Sylomer®60 Type B</p> | It is secured to the ceiling with two holes and to the profile by means of a "type B" female fixing. | 60 | 23609 |
|  <p>Gran Akustik 2 + Sylomer®60 Type B</p> | It is secured to the ceiling by a screw and to the profile by a "type B" female fixing. | 60 | 23613 |
|  <p>Gran Akustik 3 + Sylomer®60 Type B</p> | It is secured directly to the ceiling by means of a "Type B" female fixing and to the "Inverted double T" type profile thanks to the design of its metal armor. | 60 | 23615 |

CEILING MOUNTS

Gran Akustik + Sylomer[®]: Range

| REF. AMC | SUMMARY | (Kg) MAX. LOAD | CODE |
|---|--|-------------------|-------|
|  <p>Gran Akustik 1 + Sylomer[®]150 Type A</p> | It is secured directly to the ceiling with two holes and to the profile by means of a "type A" male screw. | 150 | 23617 |
|  <p>Gran Akustik 2 Type A</p> | It is secured directly to the ceiling with one screw and to the profile by means of a "type A" screw. | 150 | 23621 |
|  <p>Gran Akustik3 + Sylomer[®]150 Type A</p> | It is secured directly to the ceiling by means of one screw and to the "inverted double T" type profile thanks to the design of its metal armor. | 150 | 23623 |
|  <p>Gran Akustik 1 + Sylomer[®]150 Type B</p> | It is secured directly to the ceiling by means of two screws and to the profile by means of a "type B" female fixing. | 150 | 23625 |
|  <p>Gran Akustik 2 + Sylomer[®]150 Type B</p> | It is secured directly to the ceiling by means of one screw and to the profile by means of a "type B" female fixing. | 150 | 23629 |
|  <p>Gran Akustik 3 + Sylomer[®]150 Type B</p> | It is secured directly to the ceiling by means of one "type B" female screw and to the "inverted double T" type profile thanks to the design of its metal armor. | 150 | 23631 |

CEILING MOUNTS





SRS + Sylomer®: Models and dimensions

PRODUCT DESCRIPTION

These antivibration mounts have been conceived for the suspension of suspended ceilings or machines that rotate at low frequency. The excellent properties of the Sylomer® microcellular polyurethane combined with the low stiffness of an steel spring achieve increased isolation values as opposed to other mounts using rubber or cork, or a combination of both.







These antivibration mounts are manufactured in 6 different steel spring models to adapt optimal for each application.

Their rugged metal parts withstand can tensile stresses. They are supplied with an anticorrosive treatment that can resist tensile stresses up to 1000Kg withstand the toughest environments.

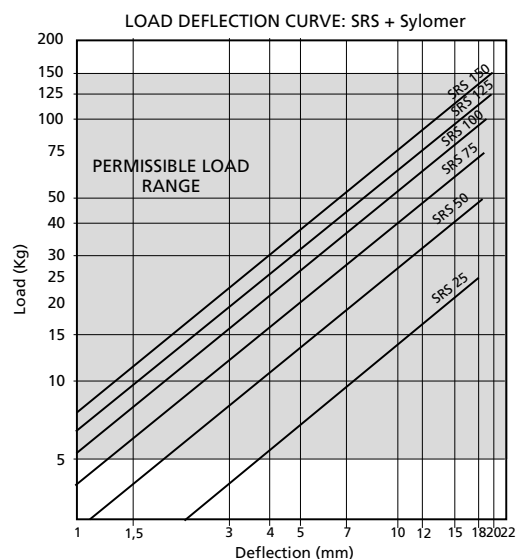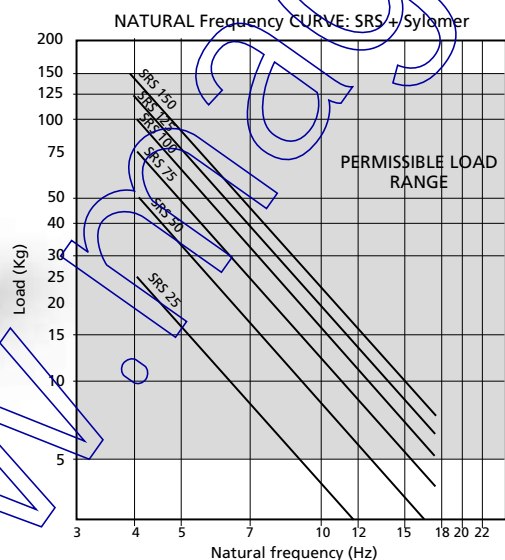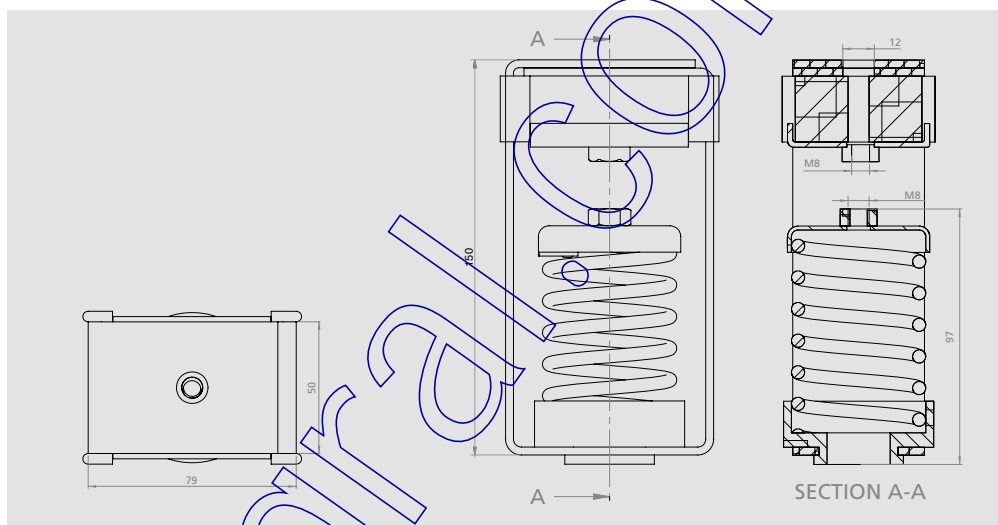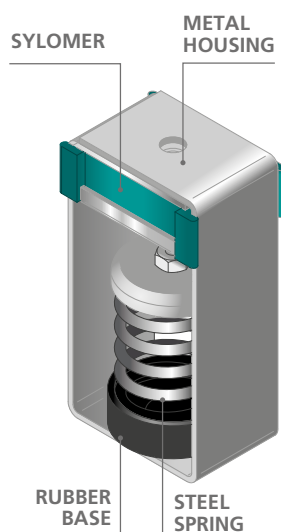

CEILING MOUNTS

SRS + Sylomer[®]: Range

| REF. AMC | SUMMARY | (Kg). MAX.LOAD | CODE |
|---|---|-------------------|-------|
|  | SRS 25 + Sylomer [®] Sylomer+Steel spring combined hanger. | 25 | 23546 |
|  | SRS 50 + Sylomer [®] Sylomer+Steel spring combined hanger. | 50 | 23547 |
|  | SRS 75 + Sylomer [®] Sylomer+Steel spring combined hanger. | 75 | 23551 |
|  | SRS 100 + Sylomer [®] Sylomer+Steel spring combined hanger. | 100 | 23548 |
|  | SRS 125 + Sylomer [®] Sylomer+Steel spring combined hanger. | 125 | 23549 |
|  | SRS 150 + Sylomer [®] Sylomer+Steel spring combined hanger. | 150 | 23550 |

WALL MOUNTS

EP + Sylomer®: Models and dimensions



LOAD AMC DEL PRODUCTO

Range designed for the floating suspension of sound-proofed walls. Sylomer® avoids the transmission of vibrations while providing optimal acoustic results.

They have a "FAIL SAFE" rugged metal structure, which is overload-proof.




Recommended for applications where fire or impact resistance is necessary.

These mounts are also suitable for the isolation of vertical pipes, or any type of lightweight ducts that need to be isolated.

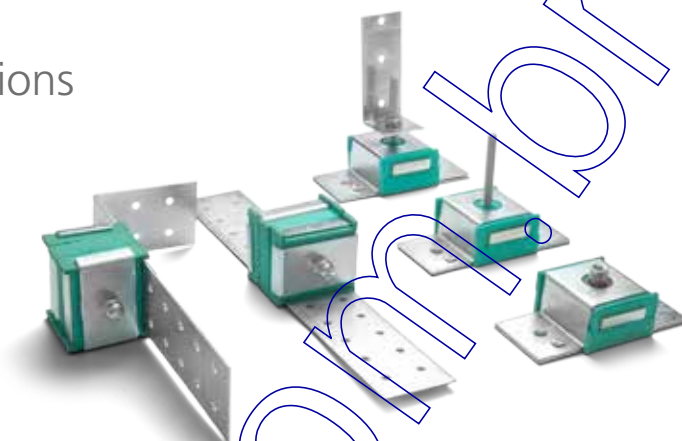




EP + Sylomer Type B

It is secured to the wall by means of two holes. It has a female M6 metal insert.

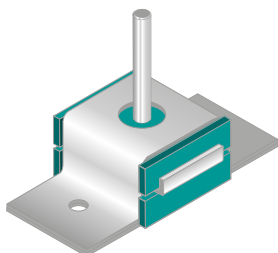




EP + Sylomer Type A

It is secured to the wall by means of two holes. It has a female M6 metal insert.

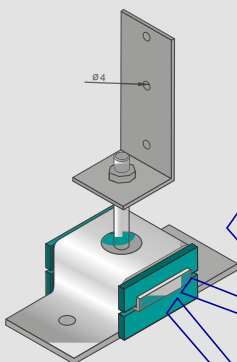


EP400 + Sylomer

It is secured to the wall by means of two holes. It has a male M6 metal insert and also an "L" welded nut for securing to the profile.

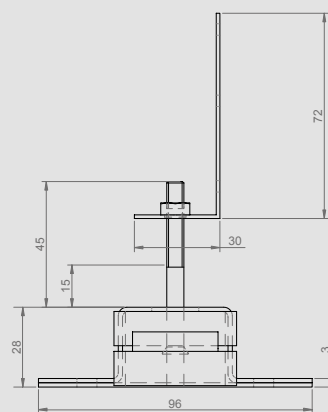


EP 600 + Sylomer

They are secured by two "predrilled" and easy-to-cut pins to facilitate their installation.

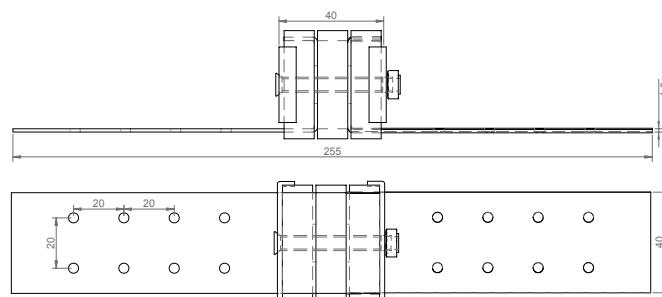

WALL MOUNTS

EP + Sylomer[®]: Models and dimensions


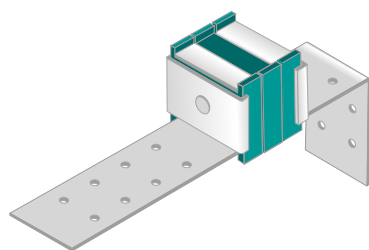


EP 650 + Sylomer

They are secured by two "predrilled" and bent pins to facilitate their installation.

This principle can be used to make a wide range of variants.


Contact us if you require a product more adapted to your building technique.

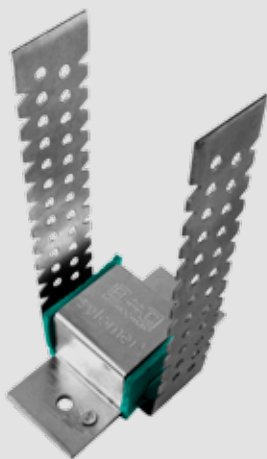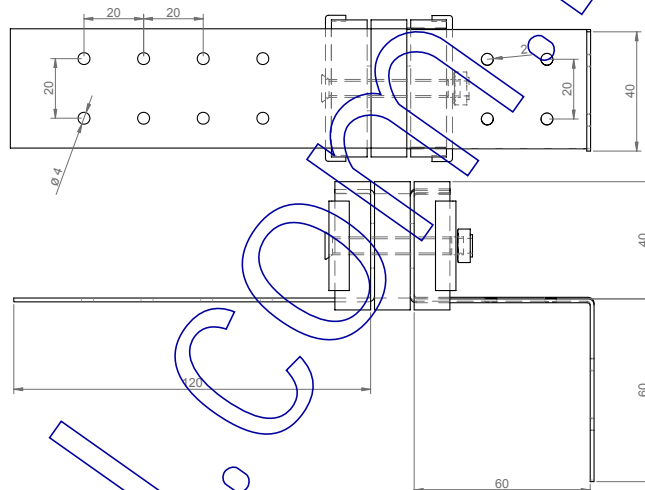

EP 700 + Sylomer


This wall mount has been designed to hold "C" profiles either in vertical or horizontal position.

Allows inclined ceilings with a simple and fast installation procedure.

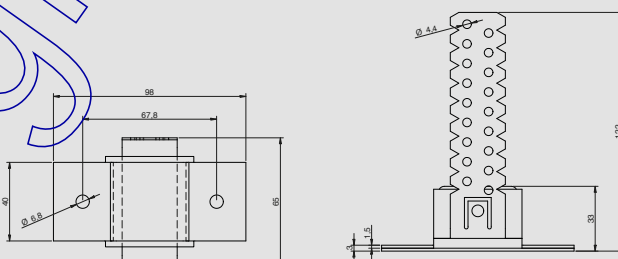


TECHNICAL CHARACTERISTICS

LOAD DEFLECTION GRAPH
EP Akustik + Sylomer **25**










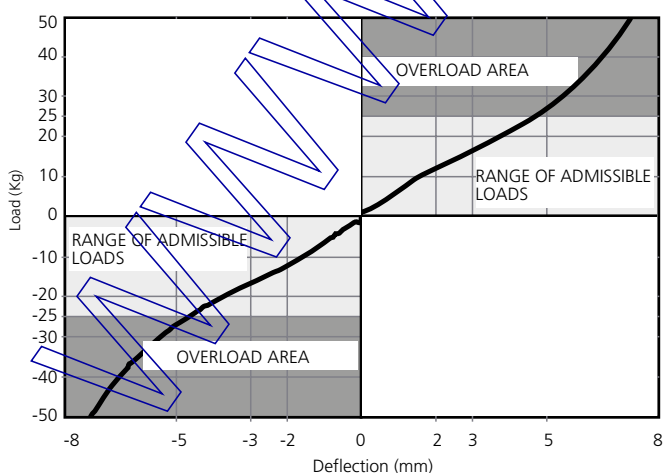




NATURAL FREQUENCY GRAPH
EP Akustik + Sylomer **25**

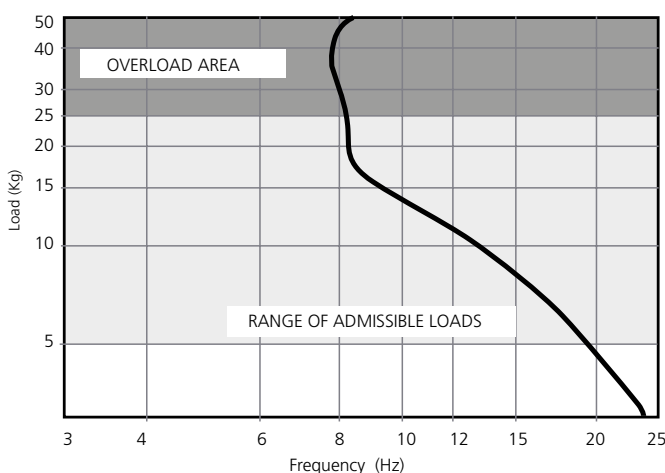

WALL MOUNTS

EP + Sylomer®: Range

| REF. AMC | INSTALLATION EXAMPLE | CODE |
|---|---|-------|
|  |  | 23701 |
|  |  | 23703 |
|  |  | 23705 |
|  |  | 23707 |
|  |  | 23709 |


| REF. AMC | (Kg). MAX. LOAD | CODE |
|--|--------------------|-------|
|  <p>EP 700 + Sylomer 30</p> | 30 | 23711 |
|  <p>EP 700 + Sylomer 75</p> | 75 | 23712 |

AKUSTIK + AMC Mekanocaucho & AKUSTIK+sylomer[®]

AKUSTIK + sylomer[®] by getzner

WALL MOUNTS

EP + Sylomer[®]: Applications

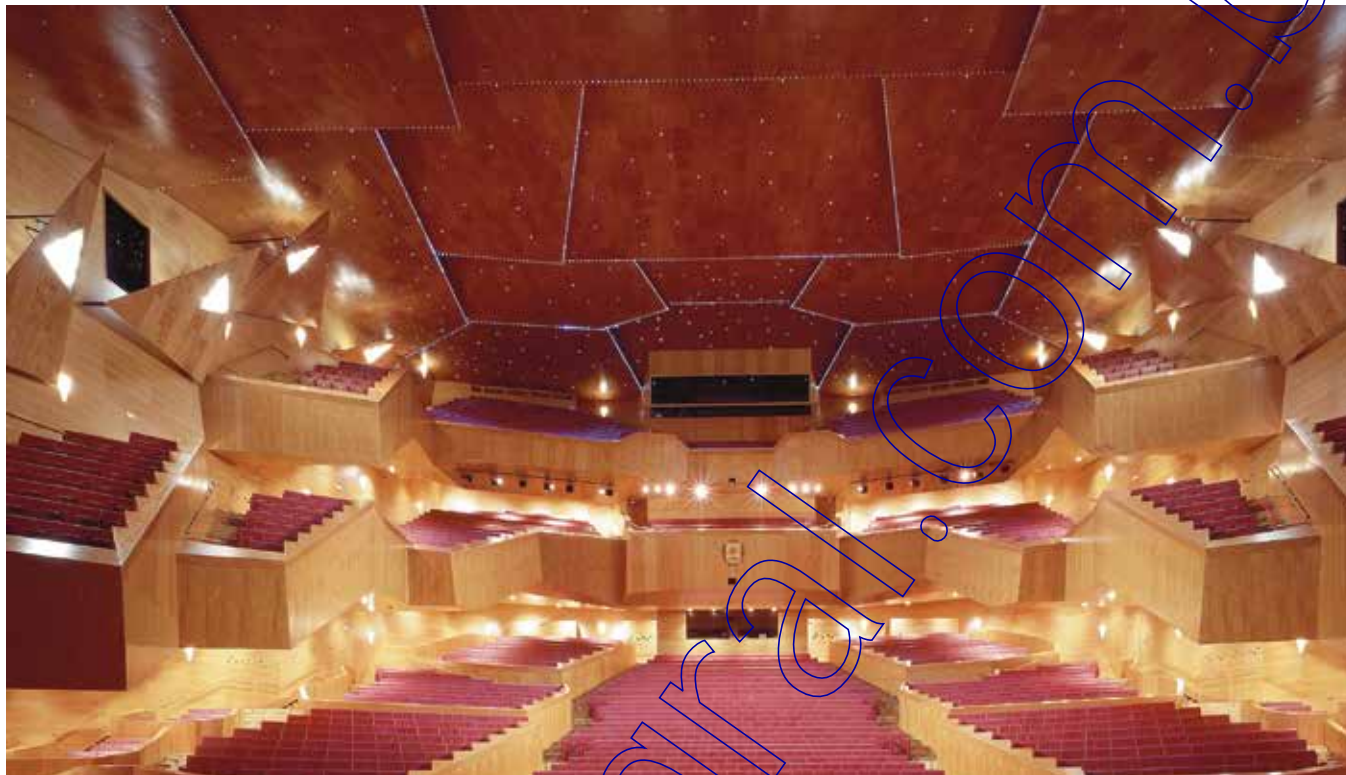

Euskalduna Auditorium Bilbao



Music School Helsinki

TSR + SYLOMER®

Models and dimensions

PRODUCT DESCRIPTION



The AMC-MECANOCAUCHO type TSR mounts incorporate a resilient polyurethane compound for antivibration purposes called Sylomer®.

The TSR mounts can be fixed mechanically thanks to the central M8 threaded hole that is welded to a metal part that incorporates an anticorrosive coating (RoHs approved).


The above Chloroprene based rubber that is bonded to the metal acts as an anti skid surface, for those application where a mechanical fixation is not possible to be made. This layer provides an additional anticorrosive protection.

In order to match the application, 6 different densities are supplied.


| Type | Min. Load (Kg) | Max. Load (Kg) | Freq (Hz) Load Min | Freq (Hz) Max Load | CODE |
|--------------------------------|----------------|----------------|--------------------|--------------------|--------|
| TSR - 55 M8 | 10 | 25 | 24,1 | 11,4 | 157001 |
| TSR - 110 M8 | 25 | 45 | 17,7 | 11,5 | 157002 |
| TSR - 220 M8 | 45 | 75 | 16,3 | 11,3 | 157003 |
| TSR - 450 M8 | 75 | 150 | 15,8 | 10,6 | 157004 |
| TSR - 850 M8 | 150 | 250 | 14,6 | 11,3 | 157005 |
| TSR - 1200 M8 | 250 | 310 | 11,3 | 10,1 | 157006 |
| TSR - 55 M10 | 10 | 25 | 24,1 | 11,4 | 157008 |
| TSR - 110 M10 | 25 | 45 | 17,7 | 11,5 | 157009 |
| TSR - 220 M10 | 45 | 75 | 16,3 | 11,3 | 157010 |
| TSR - 450 M10 | 75 | 150 | 15,8 | 10,6 | 157011 |
| TSR - 850 M10 | 150 | 250 | 14,6 | 11,3 | 157012 |
| TSR - 1200 M10 | 250 | 310 | 11,3 | 10,1 | 157013 |
| TSR - 55 M12 | 10 | 25 | 24,1 | 11,4 | 157014 |
| TSR - 110 M12 | 25 | 45 | 17,7 | 11,5 | 157015 |
| TSR - 220 M12 | 45 | 75 | 16,3 | 11,3 | 157016 |
| TSR - 450 M12 | 75 | 150 | 15,8 | 10,6 | 157017 |
| TSR - 850 M12 | 150 | 250 | 14,6 | 11,3 | 157018 |
| TSR - 1200 M12 | 250 | 310 | 11,3 | 10,1 | 157019 |
| TSR-55 M8 + Lev Kit. M8x55 | 10 | 25 | 24,1 | 11,4 | 157101 |
| TSR-110 M8+ Lev Kit. M8x55 | 25 | 45 | 17,7 | 11,5 | 157102 |
| TSR-220 M8+ Lev Kit. M8x55 | 45 | 75 | 16,3 | 11,3 | 157103 |
| TSR-450 M8+ Lev Kit. M8x55 | 75 | 150 | 15,8 | 10,6 | 157104 |
| TSR-850 M8+ Lev Kit. M8x55 | 150 | 250 | 14,6 | 11,3 | 157105 |
| TSR-1200 M8+ Lev Kit. M8x55 | 250 | 310 | 11,3 | 10,1 | 157106 |
| TSR-55 M10+ Lev Kit. M10x90 | 10 | 25 | 24,1 | 11,4 | 157107 |
| TSR-110 M10+ Lev Kit. M10x90 | 25 | 45 | 17,7 | 11,5 | 157108 |
| TSR-220 M10+ Lev Kit. M10x90 | 45 | 75 | 16,3 | 11,3 | 157109 |
| TSR-450 M10+ Lev Kit. M10x90 | 75 | 150 | 15,8 | 10,6 | 157110 |
| TSR-850 M10+ Lev Kit. M10x90 | 150 | 250 | 14,6 | 11,3 | 157111 |
| TSR-1200 M10+ Lev Kit. M10x90 | 250 | 310 | 11,3 | 10,1 | 157112 |
| TSR-55 M12+ Lev Kit. M12x100 | 10 | 25 | 24,1 | 11,4 | 157113 |
| TSR-110 M12+ Lev Kit. M12x100 | 25 | 45 | 17,7 | 11,5 | 157114 |
| TSR-220 M12+ Lev Kit. M12x100 | 45 | 75 | 16,3 | 11,3 | 157115 |
| TSR-450 M12+ Lev Kit. M12x100 | 75 | 150 | 15,8 | 10,6 | 157116 |
| TSR-850 M12+ Lev Kit. M12x100 | 150 | 250 | 14,6 | 11,3 | 157117 |
| TSR-1200 M12+ Lev Kit. M12x100 | 250 | 310 | 11,3 | 10,1 | 157118 |

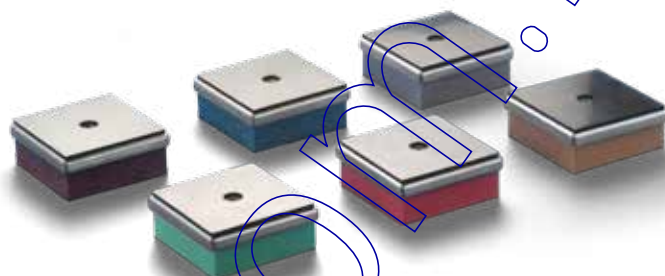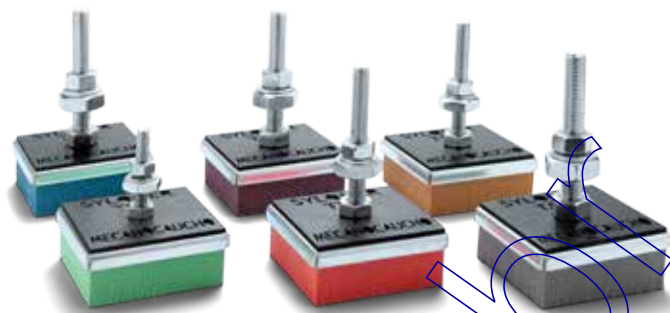













TSR without a levelling kit.

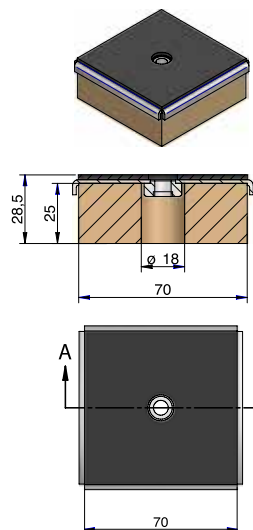


TSR with a levelling kit.

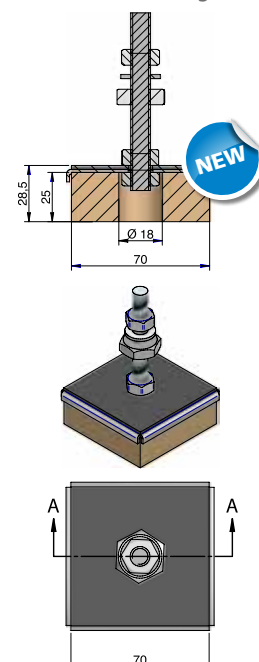



| | REF. AMC | (Kg). MAX. LOAD | Deflection curve | CODE |
|---|---|-----------------------|---|--------|
|  | TSR 55 + Sylomer[®] Max. Kg. 25 Kg Deflection 2 mm Nat.Freq. 11,4 Hz K Dyn 0,13 kN/mm E Modulus 0,70 N/mm ² | 25 |  | 157001 |
|  | TSR 110 + Sylomer[®] Max. Kg. 45 Kg Deflection 2,1 mm Nat.Freq. 11,5 Hz K Dyn 0,23 kN/mm E Modulus 1,25 N/mm ² | 45 |  | 157002 |
|  | TSR 220 + Sylomer[®] Max. Kg. 75 Kg Deflection 2,1 mm Nat.Freq. 11,3 Hz K Dyn 0,38 kN/mm E Modulus 2,05 N/mm ² | 75 |  | 157003 |
|  | TSR 450 + Sylomer[®] Max. Kg. 150 Kg Deflection 2,6 mm Nat.Freq. 10,6 Hz K Dyn 0,67 kN/mm E Modulus 3,61 N/mm ² | 150 |  | 157004 |
|  | TSR 850 + Sylomer[®] Max. Kg. 250 Kg Deflection 2,8 mm Nat.Freq. 11,3 Hz K Dyn 1,27 kN/mm E Modulus 6,85 N/mm ² | 250 |  | 157005 |
|  | TSR 1200 + Sylomer[®] Max. Kg. 310 Kg Deflection 2,9 mm Nat.Freq. 10,1 Hz K Dyn 1,24 kN/mm E Modulus 6,69 N/mm ² | 310 |  | 157006 |

| Type | Min. Load (Kg) | Max. Load (Kg) | Freq (Hz) Load Min | Freq (Hz) Max Load | CODE |
|--|-------------------|-------------------|-----------------------|-----------------------|--------|
| TSR 100x100 SR_55 M16 + Lev Kit. M16x130 | 20 | 51 | 25,4 | 12,7 | 157071 |
| TSR 100x100 SR_110 M16 + Lev Kit. M16x130 | 51 | 106 | 18,6 | 10,8 | 157072 |
| TSR 100x100 SR_220 M16 + Lev Kit. M16x130 | 106 | 194 | 16,1 | 10,4 | 157073 |
| TSR 100x100 SR_450 M16 + Lev Kit. M16x130 | 194 | 387 | 14,9 | 10 | 157074 |
| TSR 100x100 SR_850 M16 + Lev Kit. M16x130 | 387 | 638 | 14,5 | 11,3 | 157075 |
| TSR 100x100 SR_1200 M16 + Lev Kit. M16x130 | 638 | 821 | 12 | 10,5 | 157007 |

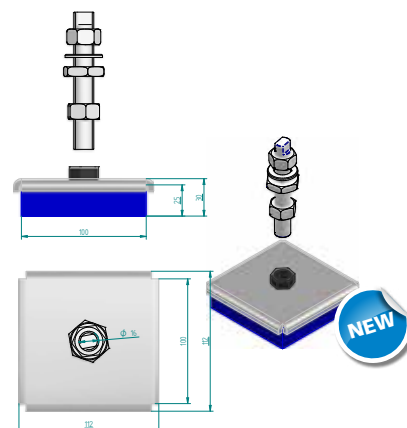

FLOATING FLOOR MOUNTS FZH + Sylomer®

DESCRIPTION





The goal of the system is to avoid the structure borne noise installing elastical mounts that are embedded in the concrete floating floor. The process of elevation is done once the concrete is dry.

The AMC-MECANOCAUCHO type FZH mounts incorporate a polyurethane elastomer called Sylomer®. This material offers optimal elastic and mechanical properties for the application.

The AMC-MECANOCAUCHO type FZH mounts can be manufactured in different densities of Sylomer to match the natural frequency needed on the application.

The process of leveling is simple and effective. The density of mount per m2 is 1.12 and the distance between the mounts is 0.9m.

INSTALLATION

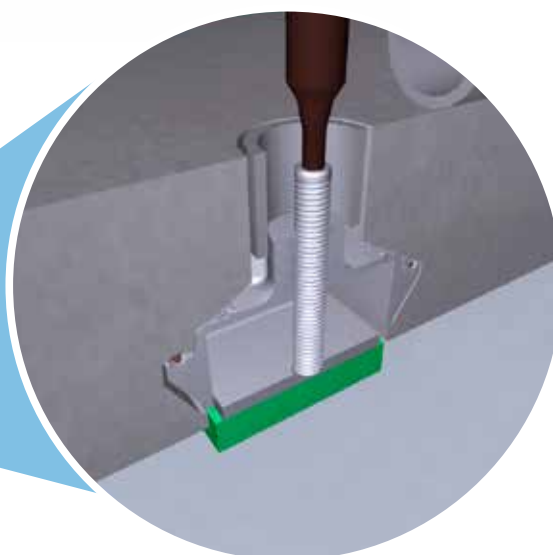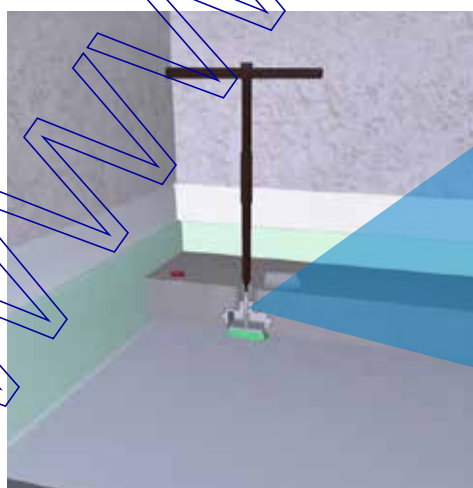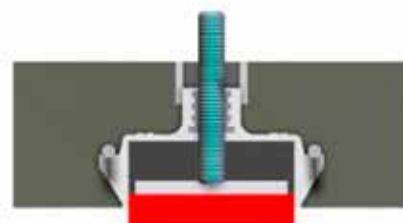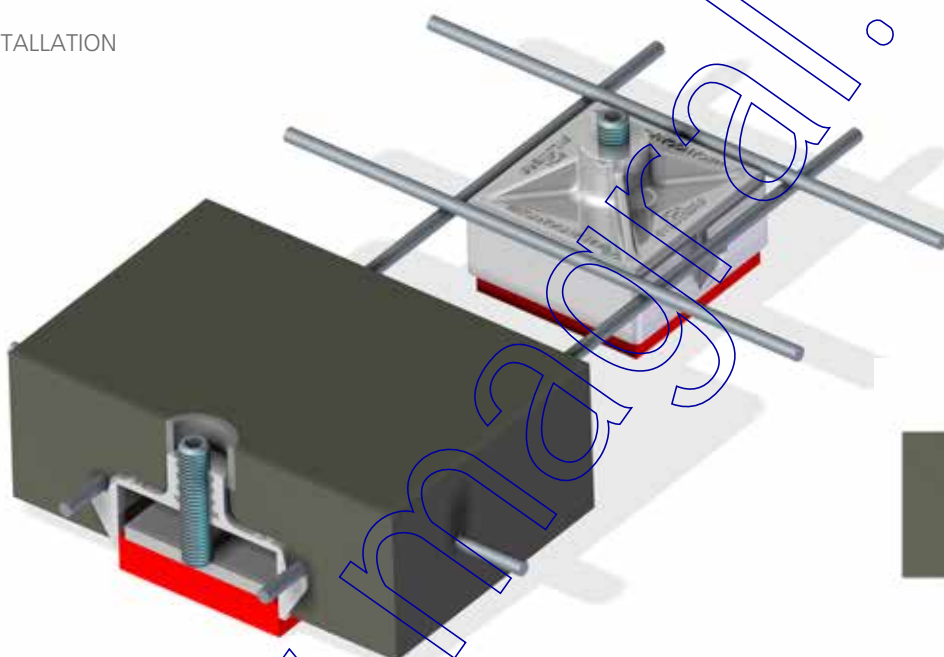

FLOATING FLOOR MOUNTS

FZH + Sylomer®: Range





| Type | SUMMARY | MAX. LOAD (Kg) | Freq (Hz) Max Load | CODE |
|---|---|----------------|--------------------|--------|
|  FZH-33-25 | Concrete embedded Jack up mounts, designed for the antivibration suspension of slabs. | 140 | 11 | 176511 |
|  FZH-33-37 | Concrete embedded Jack up mounts, designed for the antivibration suspension of slabs. | 140 | 8,6 | 176512 |
|  FZH-39-25 | Concrete embedded Jack up mounts, designed for the antivibration suspension of slabs. | 240 | 11,1 | 176513 |
|  FZH-39-37 | Concrete embedded Jack up mounts, designed for the antivibration suspension of slabs. | 240 | 8,5 | 176514 |
|  FZH-45-25 | Concrete embedded Jack up mounts, designed for the antivibration suspension of slabs. | 490 | 10,4 | 176515 |
|  FZH-45-37 | Concrete embedded Jack up mounts, designed for the antivibration suspension of slabs. | 490 | 8,1 | 176516 |
|  FZH-51-25 | Concrete embedded Jack up mounts, designed for the antivibration suspension of slabs. | 800 | 11,8 | 176517 |
|  FZH-51-37 | Concrete embedded Jack up mounts, designed for the antivibration suspension of slabs. | 800 | 9,1 | 176518 |
|  FZH-57-25 | Concrete embedded Jack up mounts, designed for the antivibration suspension of slabs. | 1000 | 11,5 | 176519 |
|  FZH-57-37 | Concrete embedded Jack up mounts, designed for the antivibration suspension of slabs. | 1000 | 8,2 | 176520 |

ADVANTAGES:




- **Lower height of the screed.** Optimum acoustic efficiency without high concrete thickness.
- This floor mount is specially interesting for those rooms who have limited space and can not use a conventional floor mount that increases the height of the floor.
- **Good isolation,** thanks to the antivibration properties of the Sylomer®. Low frequencies can be achieved providing an optimum isolation.
- **Quick installation,** no need to use plywood boards or joints between them.
- **Cost effective,** no need to use plywood boards nor joints.
- **Safe,** acoustic bridges are avoided when levelling the concrete floor.
- **Simple installation,** no specialist installators are needed.

CHARACTERISTICS

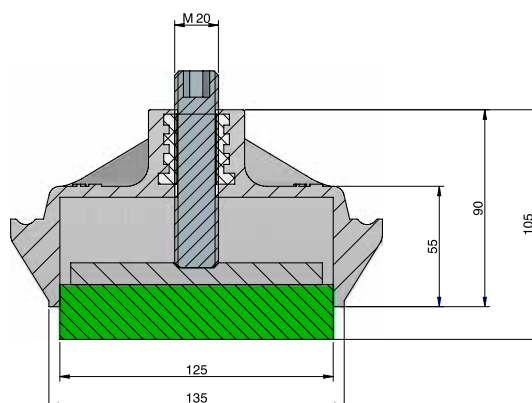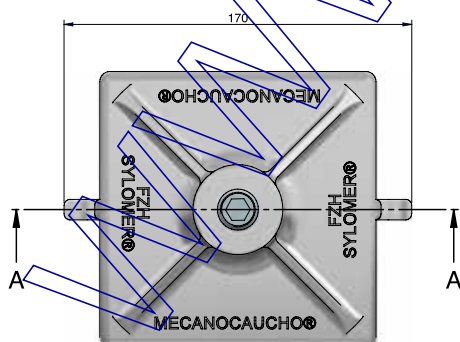

FLOATING FLOOR MOUNTS INSTALLATION FZH + Sylomer®


INSTALLATION STEPS



Conditioning the premise and installation of the mounts.



Installation of reinforced concrete.




Levelling.



Height adjustment.

COMPARATIVE TESTS AT THE LABEIN TECHNOLOGY CENTRE

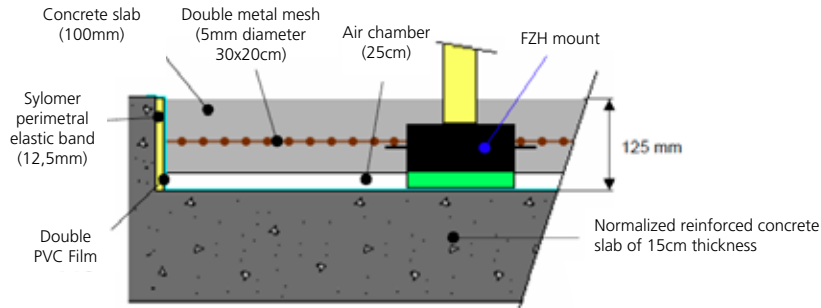

Reduction of impact noise on normalized slab according to UNE en ISO 140-8:1998

Laboratory measurements

Test specimen: Floating reinforced concrete slab of 100mm thickness, elevated at 25mm with a system of antivibration mounts as described on the above picture.

Employed supporting slab: Reinforced concrete slab of 15cm thickness, tested in 26/06/09 ($L_{n,0}$)

Volume of the receiving room: 64.7m³

Volume of the source room: 53.6m³

Surface of the test specimen: 13.86m² (3.3x4.2m)


Estimated specific mass: 250Kg/m²

Chamber temperature: 17.3 C°

Chamber Hygrometry: 77%

Weighted gain according to UNE-EN ISO 717-2:1997 $\Delta L_{n,w} (C_{1A})$: 34 (-11) dB

These results rely on the realized tests under an artificial source under Laboratory conditions (engineering method)
* L_n ≤ indicated value and ΔL ≥ indicated value (measurement limits)

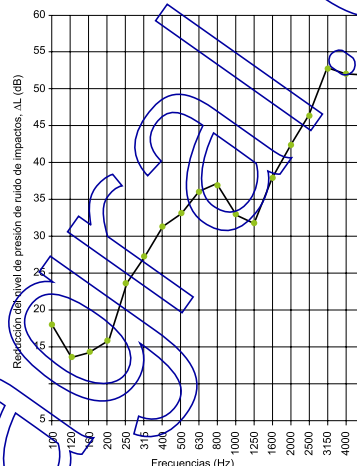

| f (Hz) | L_n (dB) | $L_{n,0}$ (dB) | ΔL (dB) |
|-----------------------|------------|----------------|-----------------|
| 100 | 47,2 | 65,1 | 17,9 |
| 125 | 46,9 | 60,5 | 13,6 |
| 160 | 53,2 | 67,5 | 14,3 |
| 200 | 49,5 | 65,3 | 15,8 |
| 250 | 41,8 | 65,4 | 23,6 |
| 315 | 37,3 | 64,7 | 27,4 |
| 400 | 34,5 | 65,9 | 31,4 |
| 500 | 34,3 | 67,5 | 33,2 |
| 630 | 31,9 | 68,0 | 36,1 |
| 800 | 32,9 | 70,1 | 37,2 |
| 1000 | 37,3 | 70,4 | 33,1 |
| 1250 | 38,9 | 70,7 | 31,8 |
| 1600 | 32,5 | 70,5 | 38,0 |
| 2000 | 27,8 | 70,3 | 42,5 |
| 2500 | 22,9 | 69,3 | 46,4 |
| 3150 | 15,3* | 68,1 | 52,8* |
| 4000 | 14,1* | 66,2 | 52,1* |
| 5000 | 11,6* | 63,9 | 52,0* |
| $L_{n,w} / L_{n,0,w}$ | 41 | 76 | |

Airborne insulation according to UNE EN ISO 140-16:2007

Laboratory measurements according to UNE ISO 140-3:1995

Test specimen: Floating reinforced concrete slab of 100mm thickness, elevated at 25mm with a system of antivibration mounts as described on the above picture.

Employed supporting slab: Reinforced concrete slab of 15cm thickness, tested in 26/06/09 ($R_{without}$)

Volume of the receiving room: 64.7m³

Volume of the source room: 53.6m³

Surface of the test specimen: 13.86m² (3.3x4.2m)


Estimated specific mass: 250Kg/m²

Chamber temperature: 17.3 C°

Chamber Hygrometry: 77%

Isolation gain indexes: ΔR_A : 13 dBA
 $\Delta R_{w'}$: 13 dB
 $\Delta (R_w + C)$: 13 dBA
 $\Delta (R_w + C_{tr})$: 13 dBA

Evaluation based in laboratory measurements according to engineering method.
* R_{with} and ΔR ≥ indicated value (measurements limits).

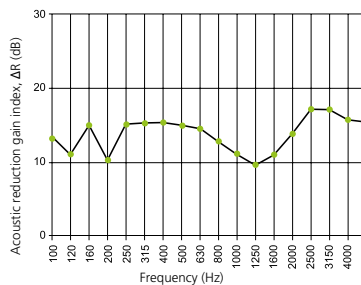

| f (Hz) | R_{with} (dB) | $R_{without}$ (dB) | ΔR (dB) |
|-------------------|-----------------|--------------------|-----------------|
| 100 | 48,4* | 34,8 | 13,6* |
| 125 | 53,7* | 42,6 | 11,1* |
| 160 | 54,6* | 39,6 | 15,0* |
| 200 | 58,1* | 47,6 | 10,5* |
| 250 | 63,0 | 47,7 | 15,3 |
| 315 | 67,6* | 52,3 | 15,3* |
| 400 | 70,4* | 54,9 | 15,5* |
| 500 | 71,0* | 56,0 | 15,0* |
| 630 | 72,3* | 57,7 | 14,6* |
| 800 | 72,8 | 59,8 | 13,0 |
| 1000 | 72,0 | 60,8 | 11,2 |
| 1250 | 71,9 | 62,2 | 9,7 |
| 1600 | 74,9 | 63,8 | 11,1 |
| 2000 | 80,8* | 66,8 | 14,0* |
| 2500 | 87,5* | 70,3 | 17,2* |
| 3150 | 91,2* | 74,1 | 17,1* |
| 4000 | 91,9* | 76,1 | 15,8* |
| 5000 | 92,3* | 76,9 | 15,4* |
| $R_w (C, C_{tr})$ | 72 (-2; -7) | 58 (-2; -7) | |
| R_A | 70,9 | 57,5 | |

APPLICATIONS




Alfortville Recording Studio.




Sheraton Casablanca Hotel.



Ep+Sylomer Type 2.

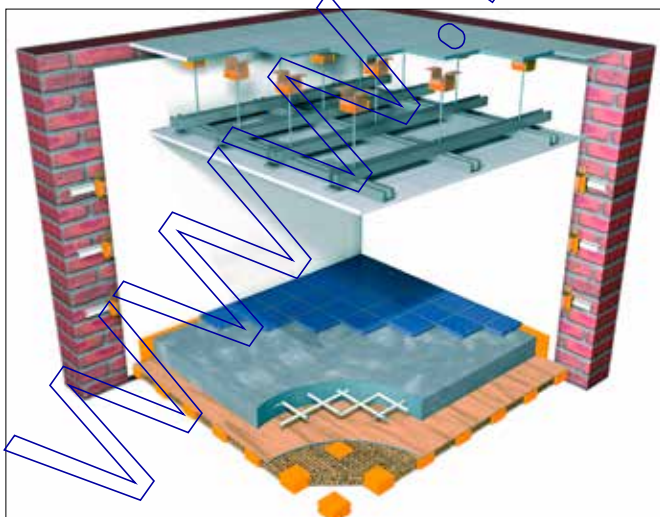

"Box in Box" principle of installation.

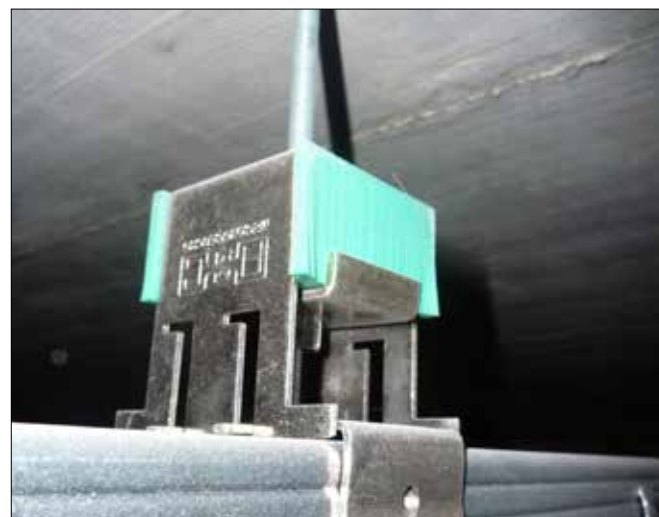

Example of installation of an Akustik Super T60 + Sylomer 30 Type B

AKUSTIK + sylomer®

APPLICATIONS



Music School in Madrid



Bier House in Finland.



Caixa Forum Zaragoza.



Example of installtion of a TSR+Sylomer®



Installation of FZH+Sylomer floor mounts on a recording studio in Spain.



Installation of an FZH+Sylomer® floor mount.

AMC REFERENCES IN THE WORLD OF SOUND

FRANCE, ITALY, SPAIN, UNITED KINGDOM, PORTUGAL, FINLAND, GREECE...

Project: BIBLIOTHEQUE
NATIONALE DE France
Country: France

Project: CINEMA PATHÉ ECHIROLLES
Country: France

Project: CINEMA NEF CHABANT
Country: France

Project: CINEMA PATHÉ BELLE EPINE
Country: France

Project: CINÉMA PATHÉ LIEVIN
Country: France

Project: CINEMA PATHÉ LAGARDE
Country: France

Project: CINEMA PATHÉ EVRY
Country: France

Project: CINEMA PATHÉ IVRY
Country: France

Project: CINEMA UGC LUDRES
Country: France

Project: ADIDAS STORE
Country: France

Project: CLUB MED STORE
Country: France

Project: CENTRE CULTURAL
ST MEDARD
Country: France

Project: THEATRE BARBEX
Country: France

Project: CINEMA UGC TALENCE
Country: France

Project: CINEMA MK2 TOLBIAC
Country: France

Project: CINEMA UGC CRETEIL
Country: France

Project: CINEMA PATHÉ BESANÇON
Country: France

Project: CINEMA PATHÉ LINGOTTO
Country: Italy

Project: MAISON
DES MUSIQUES AMPLIFIÉES
Country: France

Project: ALOUETTES
ARDIN ALFORTVILLE
Country: France

Project: PÉPINIÈRE D'ENTREPRISES
FRICHE BELLE DE MAI
Country: France

Project: AGF ASSURANCE OFFICES
Country: France

Project: CINÉMA LES AMBASSADEURS
Country: France

Project: CASA DA MUSICA
Country: Portugal

Project: CINEMA MAIA SHOPPING
Country: Portugal

Project: PALACIO EUSKALDUNA
Country: Spain

Project: BALUARTE AUDITORIO DE
NAVARRA
Country: Spain

Project: TEATRO LICEO DE BARCELONA
Country: Spain

Project: LAUREN CINEMA THX
Country: Spain

Project: AC HOTELES
Country: Spain

Project: LAUREN CINEMA THX
Country: Spain

Project: MULTICINES VALDEPEÑAS
Country: Spain

Project: CENTRO COMERCIAL
MIRAMAR
Country: Spain

Project: MAX CENTER CINES
Country: Spain

Project: CINES CORTE INGLES LISBOA
Country: Portugal

Project: CINES CARREFOUR ALICANTE
Country: Spain

Project: CENTRO COMERCIAL VIGO
Country: Spain

Project: CENTRO COMERCIAL
BOULEVARD
Country: Spain

Project: STUDIO DE TÉLÉVISION
NANTES
Country: France

Project: ZARA INDITEX
CONFERENCE HALL
Country: Spain

Project: FORUM BARCELONA
Country: Spain

Project: TERRA MITICA
Country: Spain

Project: CINEMA MAJESTIC
Country: France

Project: JDC CENTER LA SOULAIE
Country: France

Project: TEATRO ANESIS
Country: Greece

Project: RECORDING STUDIO
Country: Finland

Other Projects: BARS, DISCOTHEQUES,
CAFETERIAS, MUSEUMS, LIBRARIES,
SHOPS, PUBS.
Country: Spain, France, United
Kingdom, Italy, Portugal, Finland and
Greece.



NEW EXPOSITION TOOLS FOR THE AKUSTIK RANGE OF PRODUCTS



Adapted for show rooms
or point of sale areas.



TSR+SYLOMER® Desktop Exposition
tool for Point of sale areas.

AMC CATALOGUES



AMC-MECANOCAUCHO® ANTIVIBRATION MOUNTINGS

Rubber to metal mounts for industrial applications.




VIBRABSORBER + by getzner **sylomer**® SPRING MOUNTS

Complete range of spring mounts for industrial acoustics.




Granab® Golvregelsystem

Acoustic and technical floor for buildings.



AKUSTIKABSORBER

Soundproofing composites for industrial applications.



by getzner **sylomer**®

Micro-cellular polyurethane material specially conceived for vibration isolation.



Aplicaciones Mecánicas del Caucho, S.A.

Industrialdea Parc 35 A.
E-20.159 Asteasu. Spain.
Tel.: + 34 943 69 61 02
Fax: + 34 943 69 62 19
e-mail: sales@amcsa.es
www.mecanocaucho.com
www.akustik.com

